



Evaluation Of Rcc Building Performance With Stainless Steel Hysd Reinforcements Replacing Conventional Hysd Steel

Avadhut Makarand Behere¹, Vrunda Agarkar²

¹Research Scholar, Department of Civil Engineering, Dr. Vishwanath Karad MIT World Peace University, Pune, Maharashtra, India

* Corresponding Author Email: avadhut.behere@mitwpu.edu.in - ORCID: 0009-0009-2745-2811

²Assistant Professor, Department of Civil Engineering, Dr. Vishwanath Karad MIT World Peace University, Pune, Maharashtra, India

Email: vrund2a@gmail.com - ORCID: 0009-0009-2745-2810

Article Info:

DOI: 10.22399/ijcesn.3160

Received : 10 June 2025

Accepted : 29 August 2025

Keywords

Corrosion resistance

Ductility

ETABS analysis

Flexural behavior

High yield strength deformed (HYSD) steel

Load-bearing capacity

Abstract:

The objective of this investigation is to evaluate and contrast the performance of solid concrete (RC) structures that are reinforced with brushed stainless steel HYSD and common HYSD steel reinforcements. The study focuses on how corrosion impacts building durability and maintenance, and it investigates the viability of stainless steel as an option owing to its greater corrosion resistance, mechanical strength, and durability. ETABS software was used to assess RCC building models of varied heights (G+2, G+5, G+8) under various loading conditions, including seismic forces, in accordance with IS:1893:2016 requirements. Tensile and torsion tests on HYSD550 and SS550 reinforcement bars were carried out to confirm the computational results. The results show that stainless steel reinforcements provide comparable structural performance to conventional reinforcements, with the additional benefits of increased ductility, longer service life, and lower maintenance costs. This study shows stainless steel as a sustainable reinforcement material for important infrastructure, particularly in harsh conditions.

1. Introduction

In today's world corrosion is the main destroyer of buildings, and thus to eliminate this corrosion and increase the life of building we are going to need a corrosion resistant material. Stainless steel is becoming more prevalent in construction projects due to its aesthetic appeal, exceptional mechanical and physical properties, and resistance to corrosion[33]. The present paper pertains to the utilisation of such substances in steel-concrete composite structures, a novel application. The material called stainless steel is being utilised in construction when the 1920s, with the primary application being its use in building facades[48]. Stainless steel has gained popularity in a variety of development and load-bearing sectors due to its superior mechanical properties, including better retention of stiffness and force at high temperatures, superior corrosion resistance, and increased strength and ductility in comparison to carbon steel. Stainless steel does not necessitate the application of coatings, which results in life-cycle cost reductions in

comparison to carbon steel, particularly for offshore steel structures. Additionally, repair and maintenance costs are reduced.

Concrete that has been reinforced (RC) is a combination of materials that enhances the strength and durability of concrete by combining it with reinforcement. Consequently, concrete is susceptible to fracturing under tensile stresses due to its inherent weakness in tension and strength in compression. The tensile strength necessary to withstand external forces is achieved through the incorporation of reinforcement, which is typically bars of steel (referred to as rebar). Reinforcements are used in conjunction with building materials to improve the general stability of structural components, including beams, slabs, pillars, and walls.

The grade of the reinforcement employed significantly influences the functionality of RC structures [54]. Reinforcement enhances the durability, stability, and strength of concrete, rendering it suited to a wide range of construction projects.



Figure 1. *HYSD Steel Reinforcement and HYSD Stainless Steel Reinforcement*

1.2. Tor-Steel

The abbreviation "TOR steel" is Torsional Steel is a powerful deformed steel bar that is frequently employed in construction using reinforced concrete due to its exceptional Tensile Strength and sturdy bond with concrete. The product is offered in a variety of strength categories to accommodate a variety of construction requirements, including Fe 415, Fe 500 words, Fe 550, and Fe 600. Additionally, it is available in specialised variants such as Fe 415D, Fe 415S, Fe 500D, Fe 500S, and Fe 550D, which provide improved properties for specific applications. The material's chemical composition is tailored to meet the requirements of durability and performance in concrete reinforcement [35].

Due to its high yield strength, ductility, and great bonding properties with concrete, HYSD Steel is a regularly utilised reinforcement material in RC. Cold working (deforming) steel bars improves their mechanical properties. The ribbed surface of HYSD steel bars aids in ensuring a strong connection with the surrounding concrete [43]. The strength, longevity, and cost-effectiveness of these bars render them suitable for a variety of construction applications, such as bridges, structures, and dams. However, one of the most significant issues with typical HYSD steel is corrosion resistance, especially in areas exposed to adverse environmental conditions such as high humidity, seawater, and industrial pollutants. Corrosion may drastically erode steel over time, resulting in structural weakness and high maintenance costs.

1.3. Stainless-Steel

Steel made from stainless steel constitutes a corrosion-resistant alloy that is predominantly composed of iron, chromium, and other elements. It is highly valued for its ability to provide strength, durability, and an aesthetic surface finish. For concrete reinforcement, stainless steel is employed in a variety of high-strength grades, including SS 500, SS 550, SS 600, and SS 650, each of which is

further divided into numerous subcodes (A to G). Each strength grade undergoes a standardised set of tests to establish quality and reliability, with the intention of representing a varying level of performance.

The steel made from stainless steel is an efficient steel alloy with a reputation primarily recognised for its durability and resistance to corrosion. It comprises iron, chromium, and nickel, molybdenum, and oxygen as alloying elements. Together, they react to create a thin oxide layer on the steel's surface, which prevents corrosion caused by liquids, substances, and environmental contamination. Stainless Steel HYSD Positive reinforcement offer a variety of advantages over conventional HYSD in the context of concrete reinforcement. They are an excellent choice for use in severe environments due to their high capacity to withstand corrosion, fatigue, elevated temperatures, and chemical attacks. In addition to enhancing the overall durability of brick buildings, bridges, and various other infrastructure, stainless steel reinforcements also extend the tenure of RC structures. Builders may be able to utilise long-term performance, low maintenance, and environmental sustainability by using stainless steel reinforcements in lieu of conventional form of HYSD reinforcements, especially in areas where corrosion and/or service life is a major concern.

Reinforced Concrete (RC) buildings and other structures have commonly been the major construction material due to its durability, strength, cost-effectiveness, etc. However, the use of traditional HYSD (High Yield Strength Deformed) steel in RC buildings may have corrosion challenges, especially in humid areas, areas that have frequent salt water, or severely adverse environments. One solution that prevents corrosion challenges would be to incorporate Stainless Steel HYSD Reinforcements into the RC buildings for a long term solution [31]. Villa stainless steel will enhance the structural integrity and service life of structures made of reinforced concrete due to its high resistance to corrosion and increased durability, in addition to its long-term performance. The performance of RC constructed structures will be assessed when regular HYSD steel reinforcements are substituted with chrome-plated HYSD reinforcements in this research. This research aims to evaluate the advantages and disadvantages of utilising stainless steel reinforcements in RC structures. The mechanics, strength, load-bearing its limit, and general effectiveness of RC structures reinforced using either pure steel or traditional iron reinforcements will be evaluated [32]. Using machine learning and experimental studies, the purpose of this research is

to compare and analyse the performances of reinforcement- concrete (RC) structures filled with stainless-welded HYSD reinforcements and RC structures reinforced via conventional HYSD reinforcements. The research will examine the structural performance, mechanical properties, corrosion resistance, and loading conditions, including tectonic loading conditions. The field trial component will evaluate the computing results to evaluate the benefits of employing metal HYSD reinforcements in the context of sustainable and ongoing construction [57]. Finally, the research project will introduce novel concepts regarding the utilisation of stainless steel braces in reinforced concrete structures. It may provide a future pathway to additional sustainable and durable construction building practices that can also be economically sustainable.

2. Background Study

The lateral cyclic efficacy of circular strong concrete beams that were bolstered with stainless steel was examined by Moodley et al. (2024). They observed significant enhancements in energy dissipation, ductility, and strength in comparison to steel with carbon reinforcements. Guo et al. (2024) are currently developing a demountable steel bar connecting the components of precast concrete pavement. Their findings underscore the significance of optimising connection performance through the utilisation of high-quality steel plates, and which leads to an increase in load-carrying capacity. Zheng et al. (2024) investigate the ductile breaking behaviours of austenitic in the form of S30408 under ultra-low-cycle loading conditions. The findings underscore the superior fracture resistance of steel made of stainless in contrast to carbon steel. Ding et al. (2024) investigate the seismic retrofitting of concrete columns made from RC using grid-reinforced stainless- steel Ultra-High Achievement Concrete (UHPC) jackets. These jackets significantly enhance seismic resistance along with energy dissipation.

Chen et al. (2024) examine the mechanical characteristics of a duplex stainless steel, also called or S22053, in high-temperature and post-fire environments. Their research provides critical insights in the relationships between stress and strain, as well as reduction formulae for the durability of materials under bombardment. Duan et al. (2024) run numerical research on the behaviours and aesthetics of S35657 nickel-plated welded stub columns. Their findings compare a variety of design codes for submerged steel components. Xi et al. (2024) implemented an experimental investigation to evaluate the fire behaviours of circular hollow-

piece stub columns composed of aluminium. The investigation assessed a variety of design methodologies for the purpose of estimating the ultimate level of protection [65]. Hwang et al. (2024) examine the seismic modification potential of austenitic aluminium slit dampers, observing advantages in fire and corrosion resistance. Using European and American manufacturing standards, Meza et al. (2024) compute material criteria for stainless steel, emphasising the disparities in minimum strength requirements between the two countries. Li or Aoude (2023) investigate the influence of corrosion-resistant rebar and segments on the bending behaviour of concrete posts that are exceedingly robust and resilient to ambient and explosion loading. They discover substantial improvements in blast resistance. Rabi et al. (2022) conduct a comprehensive examination of the structural performance and long-term cost savings of stainless steel in order reinforcement in concrete structures.

Yang et al. (2023) investigate the long-term durability of metal reinforcing rods in chloride-rich environments, demonstrating that they exhibit superior corrosion resistance in comparison to conventional carbon steel [70]. Kim et al. (2023) examine the performance of stainless- steel high-load lattice girders under the age of combined load conditions, demonstrating an increase in efficiency and a decrease in deflections. Zhang et al. (2023) investigate the mechanical load behaviours of steel-based composite columns under the age of axial loading by comparing their properties to those of carbon steel and a variety of alternative materials. Wong et al. (2023) execute a life cycle analysis of metallic materials in construction, which illustrates the reduced environmental impact and decreased energy consumption that occur over the course of the structures' lifespan. Park et al. (2023) conducted an investigation into the fatigue actions of stainless steel the weldments and discovered that they exhibit a prolonged service life and a greater resistance to fatigue splitting. Li et al. (2023) evaluate the economic feasibility of metallic structural elements in bridge design by providing a cost-benefit analysis along with return on investment. The first study into the seismic effects on stainless steel horizontal elements was conducted by Liang et al. (2023), who identified significant enhancements in energy utilisation and equilibrium under seismic strain. The long-lasting strength and cost advantages of stainless steel are promoted by Rojas et al. (2023) in their evaluation of carbon- steel and titanium steel support in concrete. Kumar et al (2023) examine the influence of physical attributes on the strengthening of elevated steel in viaduct platforms, which leads to a decrease in fracture spreading and a bump in

strength. Choi et al. (2023) conduct a comprehensive examination of the applications of stainless steel in maritime environments, with an emphasis on long-term structural stability and corrosion resistance. Chen et al. (2023) examine the behaviour of the stainless steel hollow portions under compressive loading, demonstrating that they are more ductile and strong than conventional materials. Paulo et al. (2023) assess the influence of extreme temperatures on aluminium frame components, thereby providing valuable insights into fire resistance and structural strength.

The study reveals a variety of gaps in the current corpus of knowledge concerning the use of structural steel structure in RCC buildings. The limited stated use of titanium reinforcements outside of particular G+2 hostel project is a significant lacuna [47]. The current body of research does not offer a comprehensive examination of the extent to which these reinforcements influence the building's energy absorption, ductility, and strength, particularly in earthquake-prone regions. Further research is required to evaluate the prevalent use of aluminium reinforcements that are their impact on diversified construction concepts, and their function in enhancing seismic resistance in order to address these gaps.

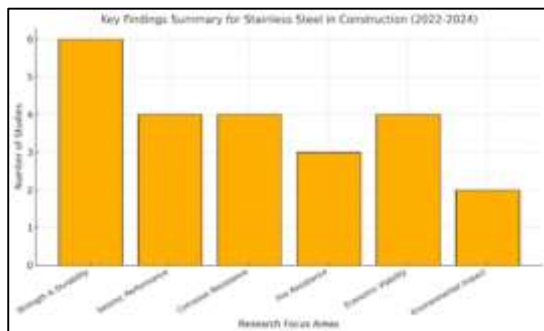


Figure 2. Key findings summary

The bar chart summarises important research priority areas for stainless steel in construction based on studies conducted between 2022 and 2024. The results are organized into the following six themes:

- **Strength and Durability:** The most studies (6) were recorded in this area and indicate promising interest in improving energy dissipation, ductility, and resistance to mechanical loads with stainless steel.
- **Seismic Effectiveness:** Four studies investigated the seismic activity of stainless steel, emphasising the advantages of seismic information and retrofitting options [39].
- **Corrosion Resistance:** Four studies demonstrated superior corrosion resistance compared to common steel, particularly when in chloride-rich or marine environments.

- **Fire Resistance:** Three studies showcased behaviour under elevated temperatures and elevated temperatures post-fire, an increase in stainless steel properties were evident.
- **Economic viability:** Four studies examined long-term cost reductions and economic advantages of stainless steel -especially with bridges and infrastructure.
- **Environmental Impact:** Two studies investigating the life cycle impact of stainless steel fell to a lower environmental impact compared to traditional materials in construction.

The chart demonstrates the various benefits and flexible nature of stainless steel in construction from mechanical properties all the way to economic and impact factors. This reinforces growing value of including stainless steel in current engineering and design aspects.

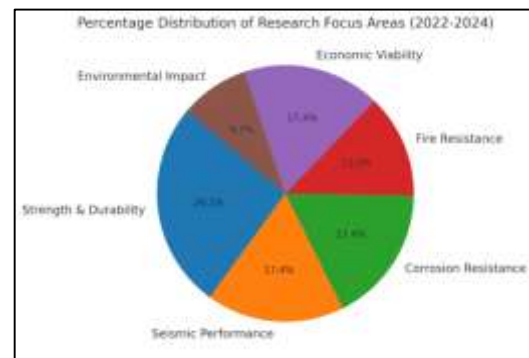


Figure 3. Percentage distribution of research focus areas

The graphic illustrates the percentage distribution of studies in six research priority areas (2022-2024). It shows that studies focused on "Strength and Durability" represent the greatest number of studies followed by studies on several of the remaining areas of interest which included; seismic performance, corrosion resistance and economic feasibility.

The aim of this research project is to conduct a thorough examination and resolution of these deficiencies by first examining the features of stainless steel (K. Zhang et al., 2014). Consequently, the ETABS developing analysis application was employed to generate models of concrete reinforced with cement (RCC) structures (G+2), (G+5), and (G+8) that were composed of stainless steel soft fortifications (SS550) and HYSD550 replacements in accordance with the specified specifications. Lastly, analysis of a range of loading conditions for reinforced concrete construction (RCC) should be complete and the performance of reinforced stainless steel reinforcements compared to HYSD reinforcements under different loading conditions.

3. Research Design

Chapter 3 details the methodology applied in this study to fulfill the research objectives. It is a step-by-step framework work that highlights how to gather data, run analyses, and evaluate results. Chapter 3 begins with an introduction that contextualizes the research, providing the purpose of the study and the problem being addressed within the study. It describes the research design, data collection, and analysis to uphold to accuracy, reliability, and validity in the study conclusions. The methodology has a combination of theoretical and practical elements, which includes modelling a structure, material properties, loading conditions, and utilizing more developed simulation and analysis instruments. Chapter 3 provides a template by capturing each element of the methodology to understand how the research was undertaken and what was done to ensure complete and worthwhile outputs.

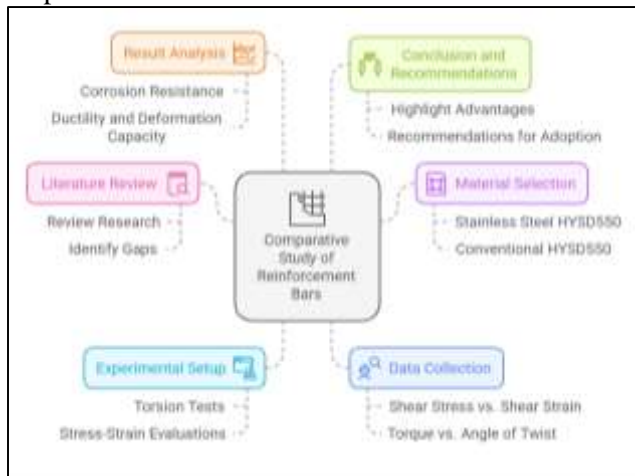


Figure 4. Process diagram

In this research, the models (G+2, G+5 and G+8) have been modeled using HYSD550 and SS550 reinforcement types. The material properties used include: M30 grade concrete and various rebar types including, HYSD550 and SS550. The columns have sizes of 350 mm × 350 mm for G+2, 400 mm × 400 mm for G+5, and 450 mm × 450 mm for G+8 [63]. The beams have sizes of 250 mm × 350 mm, while the slabs are 150 mm thick. Shear walls are 250 mm thick, and diaphragms are modeled as rigid.

The structure uses M30 grade concrete for all elements. Reinforcement materials include HYSD 550 and SS 550. Column sizes vary based on building height: 350×350 mm (G+2), 400×400 mm (G+5), and 450×450 mm (G+8). Beams are 250×350 mm, and slabs have a 150 mm thickness. The shear wall thickness is 250 mm, and the diaphragm is considered rigid. The stresses that are administered are as follows: DL (Dead Load), Dds (Super deceased load), LL (Live Start), RLL (Roof Live

Eat), and earthquake forces in both the X and Y dimensions (EQ X, EQ Y).

The analysis takes into account the following loads: self-weight, finished floor loads, live loads, top live loads, and vibrations in both the left and right orientations. The study examines Zone-III with Building Type-II and a Value Factor of 1 for seismic loading (EQ X and EQ Y). The time periods are contingent upon the building's height, and the Response Mitigation Factor is 5. The time periods for G+2, G+5, and G+8 models are 0.176, 0.353, and 0.530, respectively, according to IS:1893:2016 standards.

Figure 5. M30 Grade of Concrete

Figure 6. Input values of SS550 Reinforcements

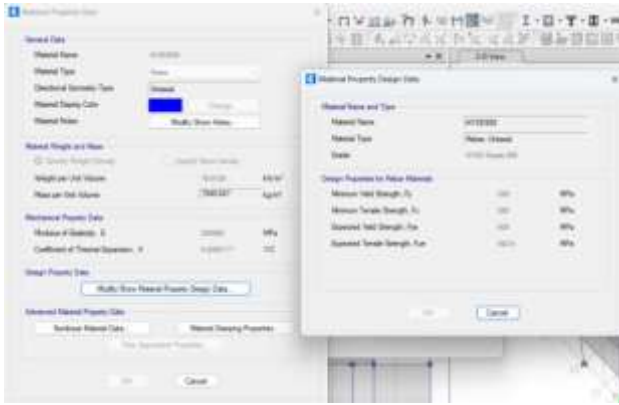


Figure 7. Input values of HYSD550 Reinforcements

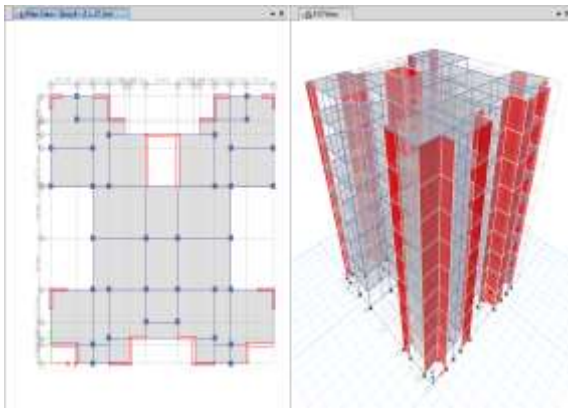


Figure 8. Plan & 3D view of the building

4. Findings and Analysis

The findings and examination The simulations and experiments conducted in this chapter provide the comprehensive results of the evaluation of the performance of buildings for the RCC reinforced with standard HYSD reinforcement made of steel and Stainless Steel HYSD reinforcements [60]. The results are an essential component of this investigation. This chapter conducts a systematic analysis of the seismic performance of properties with varying configurations (G+2, G+5, and G+8) in relation to their potential actual building performances, which are determined by structural characteristics (displacement, drift, place shear, time period, and amount) under varying loading configurations. Several advanced seismic modelling instruments such as ETABS have helped to demonstrate if and how seismic- decisions impact major structural parameters of significant scope. In each structural detail, special headings show purposefully and large consequences for seismic performance, durability and long term sustainability. This chapter illustrates the distinct advantage of integrating steel alloy buttresses to improve the durability and robustness of RCC constructions, and it evaluates the predicted results with the actual performance.

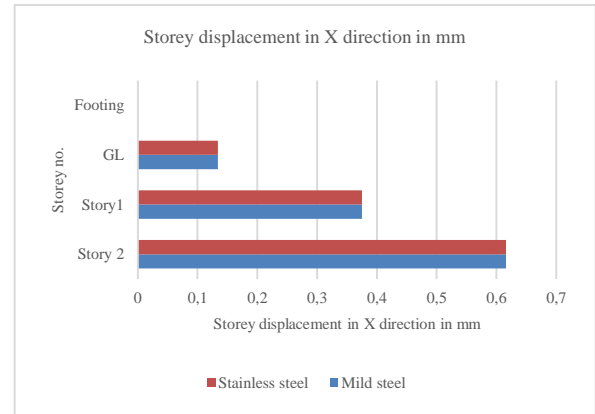


Figure 9. Graph G+2 building storey displacement in X direction

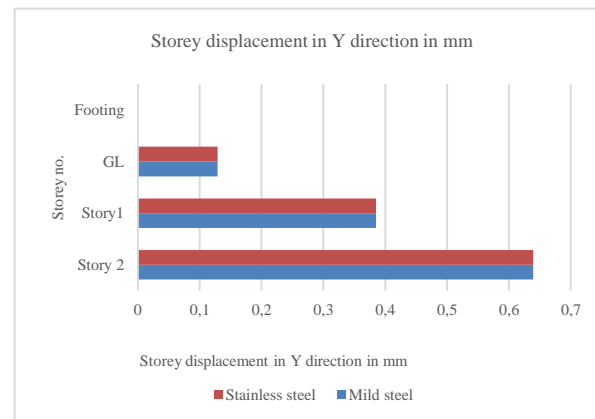


Figure 10. Graph G+2 building storey displacement in Y direction

- HYSD 500 and SS 550 show identical storey displacement results.
- Maximum displacement occurs at the top storey and decreases towards the ground.
- Both materials provide similar structural behavior under the given loading conditions.
- Material selection does not impact storey displacement in these buildings (Medhekar & Kennedy, 2000).
- Structural stability depends on overall design rather than material type.

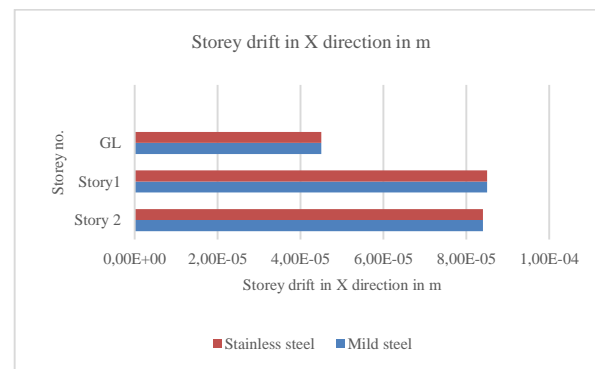


Figure 11. Graph G+2 building storey drift in X direction

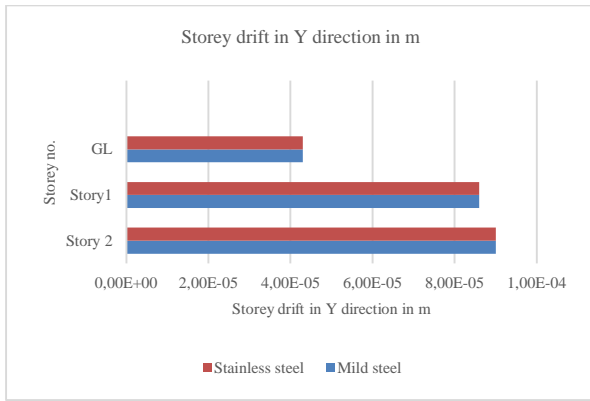


Figure 12. Graph G+2 building storey drift in Y direction

HYSD 500 and SS 550 exhibit identical storey drift behavior.

- Maximum storey drift occurs at upper storeys and decreases towards the ground.
- Both materials provide equal resistance to storey drift under lateral loading.
- Material selection does not impact storey drift results.
- Structural drift behavior is governed by overall building design rather than material type.

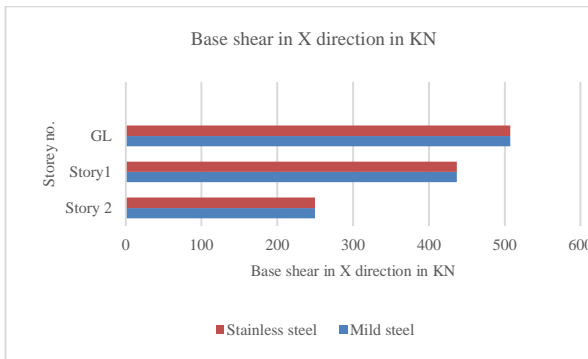


Figure 13. Graph G+2 building base shear in X direction

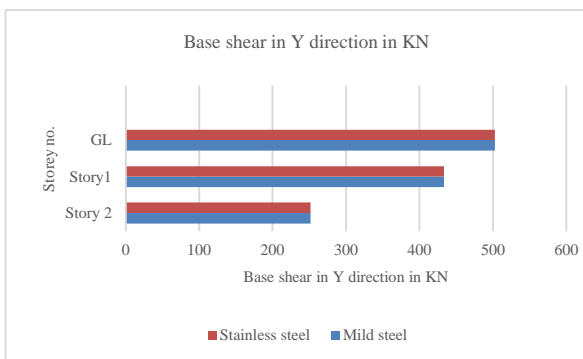


Figure 14. Graph G+2 building base shear in Y direction

- HYSD 500 and SS 550 show identical base shear values in both X and Y directions.
- The maximum base shear is attained at lowest point and diminishes as the height increases.

- The increase in base shear towards the ground follows the expected cumulative mass and stiffness distribution.
- Strong foundation and lower storey reinforcement are crucial to resist base shear.
- Material selection does not impact base shear distribution or overall structural stability.

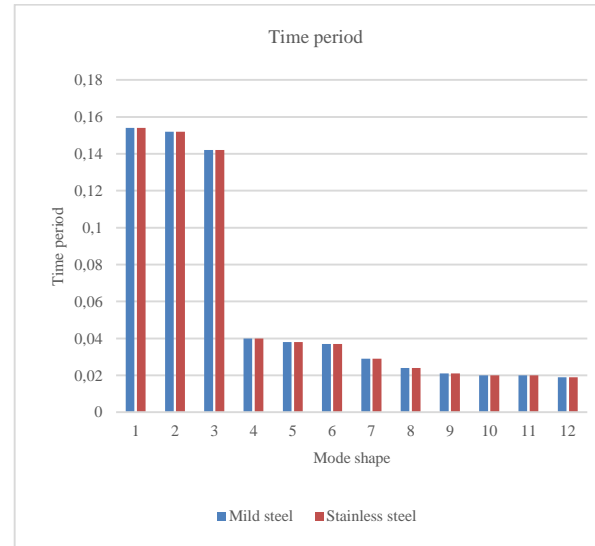


Figure 15. Graph G+2 building time period

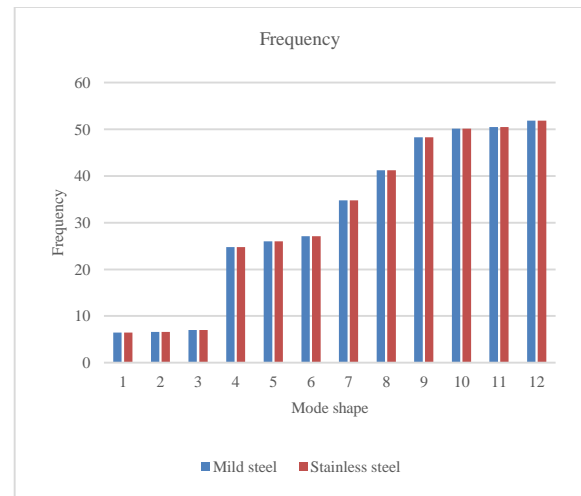


Figure 16. Graph G+2 building frequency

- HYSD 500 and SS 550 show identical time period and frequency values, indicating no impact on dynamic behavior.
- Time periods decrease as mode numbers increase, leading to faster oscillations in higher modes.
- Natural frequencies increase with mode number, showing more rapid and complex vibrations.
- Higher modes exhibit quicker oscillations, crucial for seismic performance assessment.
- Dynamic behavior is primarily governed by building geometry and structural configuration, not material type [38].

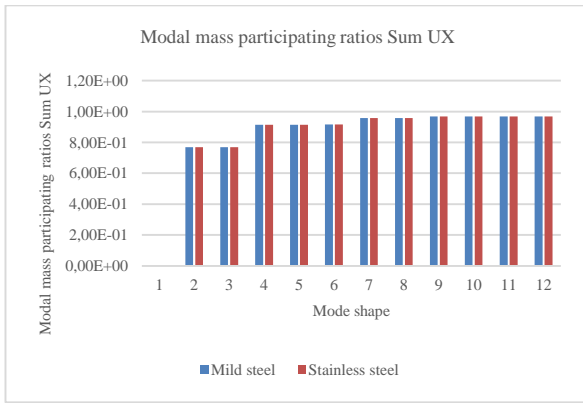


Figure 17. Graph G+2 building modal mass participating ratios sum UX

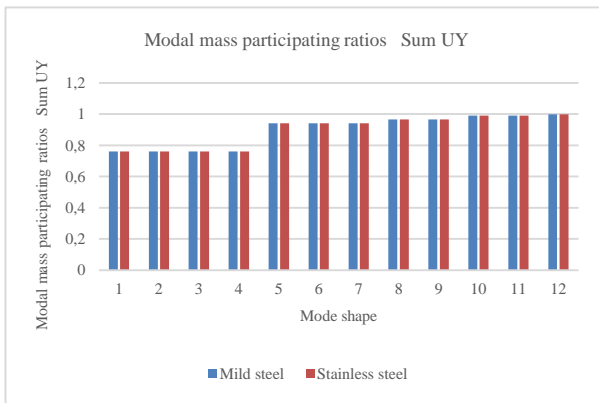


Figure 18. Graph G+2 building modal mass participating ratios sum UY

- Both HYSD 500 and SS 550 exhibit identical modal mass participation, indicating no effect of material choice on dynamic response.
- Initial modes have low mass participation.
- Mass participation increases sharply in subsequent modes.
- Higher modes capture nearly all mass, leading to saturation.
- UX Direction: Minimal mass in the first mode, with rapid increase to near-saturation by higher modes.
- UY Direction: Early modes capture a significant portion of mass, stabilizing at ~96-99% in later modes.
- The majority of mass is engaged in lower modes, crucial for understanding lateral force distribution and seismic resilience

5. Towards Experimental Verification of Computational Results

The ETABS study provided valuable insights into the fundamental efficiency of RCC structures that were reinforced with stainless metal HYSD and common HYSD steel buttresses. The results demonstrated equivalent responses of the structure in the form of displacement, move base shear, and

fluid characteristics under a variety of loading conditions. In computational models, both materials demonstrated comparable performance. However, the stainless- steel HYSD has internal advantages, including superior resistance to rust and long-term durability, who warrant further investigation. In order to confirm the computational findings and conduct a more thorough examination of the reinforcement bars' mechanical behaviour, experimental testing was implemented. Subsequent The subsequent section emphasises the experimental results, with a particular emphasis on the reinforcement bars' tensile and torsional properties. For all tensile and torsion testing, test specimens of the reinforcement bars had to be prepared. Test specimens were selected and then prepared in a manner that would ensure that test specimens were prepared consistently and could be tested and evaluated per the testing criteria. The specimen that was created for the tensile evaluation had an initial length (l_1) of fifty microns, which is approximately five times the diameter, and a previous diameter (d_1) of 10 mm. The specimen's total parallel length was 1000 mm, which is sufficient for the testing (Liu et al., 2019). Upon completion of the tensile testing, the specimen's final diameter (d_2) was 5.4 mm, which indicates that the tensile force had caused necking.

A universal tester (UTM) was employed to conduct the tensile test, which also included an extensometer for precise elongation measurement. The gauge length (l_1) was evaluated at the test by quantifying the specimen's increased length using the lengthening scale on the instrument. The test produced linear stress readings in comparison to strain data until the point at which it breaks, which signifies the switch from elastic contract to deformation of plastic. The elongation of the specimen during the plastic region increased net elongation significantly, and the SS550 reinforcement bars demonstrated increased elongation in comparison to the HYSD550 bars. For instance, at a load of 150 kN, the SS550 had a strain of 2.1 as opposed to 0.197 for the HYSD550, indicating its superior ductility.

In the torsion test, specimens were loaded with torque to obtain angular deformation. The gauge's length and original size of the test model were documented in order to ascertain the angle of pressure and shear strain. The measurement can be used to determine the torque (T), angles of rotation (θ), shear pressure (τ), shear load (γ), and modulus of shear (G) of each specimen (Wang et al., 2016). While the shear modulus of the HYSD550 was measured consistently to be 147 GPa, the shear modulus of the SS550 was measured consistently to be lower at 92 GPa, meaning the SS550 has greater

angular flexibility. SS550 also had greater angle of twist for the same torque applied, with maximum twist observed to be 2.4° and 300 Nm of torque applied for SS550 as compared to 1.5° for the HYSD550 at the same torque.

Observations from Specimen Testing

1. Before Testing:

- Original Diameter (d_1): 10 mm
- Cross-sectional Area: $\pi d_1^2/4 \approx 78.53 \text{ mm}^2$
- Original Gauge Length (l_1): 50 mm
- Parallel Length: 1000 mm

2. After Testing:

- Final Diameter (d_2): 5.4 mm
- Final Gauge Length (l_2): 62.80 mm
- Cross-sectional Area: Calculated using the reduced diameter after testing.

The considerable decrease in both diameter and the increase in gauge length representing SS550's ability to undergo substantial plastic deformation prior to failure was an important characteristic for high ductile applications. The mechanical and torsional behavior of Stainless Steel HYSD550 (SS550) and ordinary HYSD550 reinforcement bars were evaluated in the experimental study to complement computational evaluations and provide more detailed insight about the performance of reinforcement materials. Tensile tests were performed through the Universal Testing Machine (UTM) to examine stress strain relationships, elongation behavior and regions of deformation [59]. The torque, angle of rotation, shear stress, strain caused by shear, and shear modulus were all examined through torsion tests.

In a tensile test, both reinforcement varieties were evaluated. Both types of reinforcement were given a progressive loading to investigate the behavior through the linear elastic region to the fracture point. Stress-strain data indicated HYSD550 showed to be higher in stress values at equivalent strain level suggesting it was stiffer and stronger, while SS550 showed higher elongation and strain capacity, as well as the ability to sustain larger deformations before failure. As outlined in the tensile results, at maximum tensile strength, SS550 had very much higher strain compared to HYSD550, indicating the ductility and plastic deformation characteristics of it as well. This is a critical property for reinforcement where flexibility and energy absorption may be desired.



Figure 19. Torsion Test Specimen Inspection Before Testing



Figure 20. Torsion Testing Machine Setup



Figure 21. Setting up a universal testing machine (UTM)

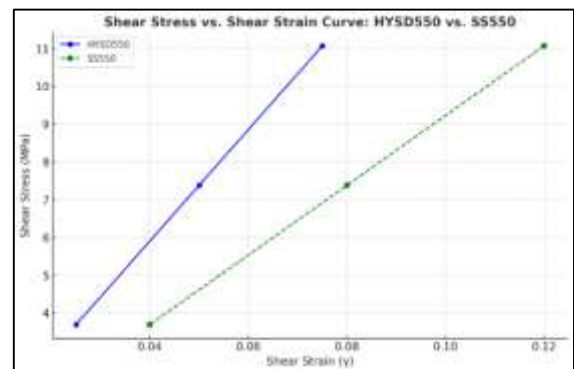


Figure 22. The shear stress versus shear strain plot shows the torsional behaviour between HYSD550 and SS550.

The slope of HYSD550 shows a greater angle leading to a greater angular shear modulus (shear to stress), but SS550 shows greater shear strain at comparable stress levels showing greater ductility.

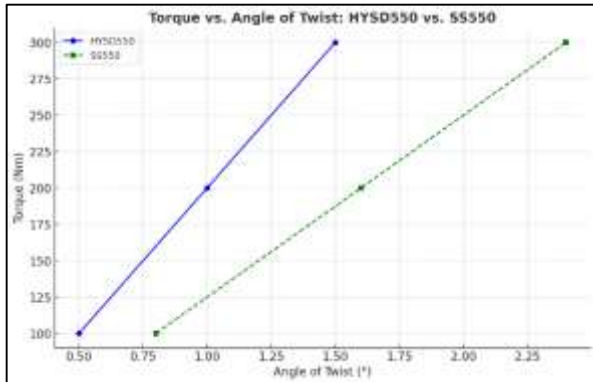


Figure 23. The above graph illustrates the torque vs angle of twist for both HYSD550 and SS550.

HYSD550 has a steeper slope, indicating it is better at resisting angular deformation (angular stiffness) while SS550 has a shallower slope, indicating greater angular deformation for the same force.



Figure 24. The stress-strain plot compares the performance of the two materials, HYSD550 and SS550.

The HYSD550 produces greater stress values for the same strain levels, it therefore possesses greater strength (Yang et al., 2019). The SS550 has higher strain at comparable stress levels. For this reason, SS550 shows a greater ductility and ability to bend plastically/ deform before failure. While HYSD550 can therefore be useful where high strength is required, SS550 would be preferred in applications where there is potential for greater deformation before rupture.

Stress and Strain Analysis

The following formulas were employed to determine the stress and strain values:

- Stress: $\sigma = F / A$, where F is the applied force, and A is the cross-sectional area.
 - Strain: $\epsilon = \Delta l / l_1$, where Δl is the change in length, and l_1 is the original gauge length.
- For HYSD550, the maximum stress ever obtained was 2.55 MPa at the 200 kN load before failure.

SS550 recorded a lower value of stress, at 2.8 MPa at the same load, but with a much higher set of strain values, demonstrating an ability to absorb energy and deform plastically.

Torsion Test Observations

In the torsion test, the behavior of the materials under angular deformation was observed:

- HYSD550: Showed higher stiffness with a steeper torque-angle relationship and less angular deformation.
- SS550: Demonstrated higher ductility with a gradual torque-angle relationship and greater angular deformation.

The outcomes of the tensile and torsion tests conform to the predicted computational analysis, confirming the superior performance of SS550 in terms of ductility and flexibility. These characteristics make SS550 ideally suited for applications where dynamic loading, seismic conditions, or greater corrosion resistance are of concern. In summary, the experimental study shows that SS550 reinforcement bars has better ductility, deformation capacity and versatility for dynamic loading circumstances compared to HYSD550. Although HYSD550 is still a valid alternative for conventional construction practices, SS550's greater flexibility and corrosion resistance provides a practical means of producing durable constructions in tough conditions and environments. The experimental results were comparable to the computational results, and promoting SS550 has the opportunity to disturb the traditional methods of reinforcement used in heavy infrastructure projects.

Cost estimation:

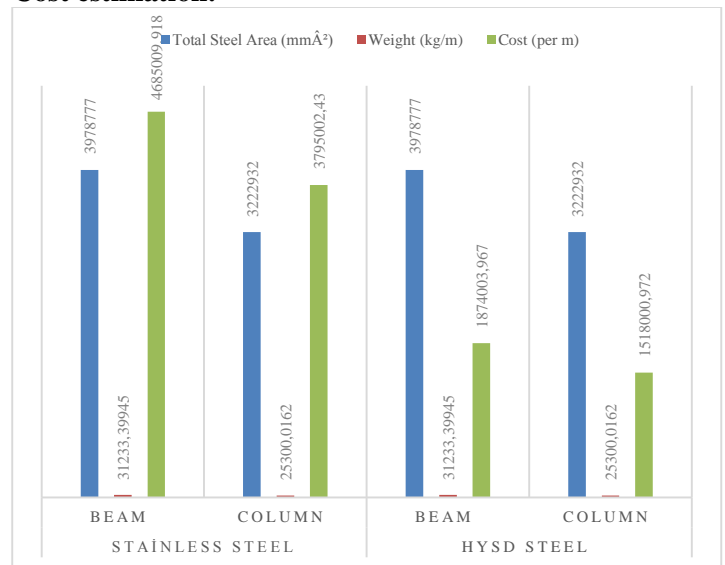


Figure 25. Cost estimation of both steel

- The chart provides a comparison of total steel area, weight per meter, and cost per meter for stainless

steel and high yield strength deformed (HYSD) steel used in beam and column structural elements.

- For stainless steel, the total steel area used in beams is 3,978,777 mm², with its weight at 31,233.40 kg/m, and cost at 4,685,009.92 per meter. Likewise, for columns, the total steel area is 3,222,932 mm², with weight at 25,300.02 kg/m, and cost at 3,795,002.43 per meter.
- In comparison, for HYSD steel, the total steel area for beams remains the same at 3,978,777 mm², with an identical weight of 31,233.40 kg/m. However, the cost per meter is significantly lower at 1,874,003.97 per meter. Likewise, for columns, the total steel area is 3,222,932 mm², with a weight of 25,300.02 kg/m, and the cost per meter is 1,518,000.97.
- Despite the fact that the consumption of materials in the sense of stainless steel area and the weight remains stable between the two materials and HYSD stainless steel for both supports and beams, the data plainly shows that the cost of gleaming steel is significantly higher than that of HYSD steel. This cost differential highlights the economic implications of material selection, where stainless steel, despite its superior corrosion resistance and durability, incurs significantly higher expenses compared to HYSD steel.

6. Conclusion

The efficacy of reinforce concrete (RC) structures fortified with stainless-welded HYSD550 (SS550) and typical HYSD550 bars of reinforcement is comprehensively evaluated in this study. ETABS software was used to conduct a full computational analysis of RCC building models of varied heights (G+2, G+5, and G+8) under various loading conditions, including seismic stresses, in accordance with IS:1893:2016 requirements. The simulation results for the mechanical and torsional behaviour of HYSD550 and SS550 bars were also compared to the experimental tensile and torsion test results. This comparison encompassed technical characteristics, stress-strain properties, stretching, torque, angle of twist, and ductility. The results of the comparison enabled a more comprehensive understanding of the material's mechanical motion and torsional behaviour.

The structural behaviour of each reinforcement element was comparable in terms of evicution, drift, base shear, duration, and natural frequencies, as indicated by the ETABS analysis. While the simulations indicated that the structural reactions to the materials were effectively identical it was evident from the experimental results that there were substantial differences. The SS550 reinforcement bars have proven to be superior to the HYSD550 reinforcement bars in terms of ductility, deformation

capacity, and corrosion resistance, making SS550 the ideal materials for critical applications requiring resistance to dynamic loading or seismic activity and exposure to corrosive conditions. The experimental analysis demonstrates SS550's capacity to withstand greater elongation or plastic deformation prior to collapse, and would be suited to all infrastructure types located in an earthquake prone region or severe climatic environments such as coastal or industrial environments. On the other hand, HYSD550 bars had a higher stiffness; they also expressed a steeper relationship between torque and angle, meaning they will hold up better in an application requiring higher rigidity and less deformation. Stainless steel costs substantially more than HYSD steel, although both have the same steel area and weight. Stainless steel has better durability and resistance to corrosion than HYSD steel, but in structural application where corrosion resistance is not as important, it is clear that HYSD steel is more cost-effective.

In this case, the project helped to build a bridge between theoretical and practical applications, specifically in demonstrating the suitability of stainless steel as a reinforcement, whilst demonstrating SS550 reinforcements can meet and exceed structural performance, as well as, durability and sustainability value. Although this study only examined particular building configurations and controlled experimental conditions, future studies should examine a wider selection of building designs and more realistic scenarios. Performance scenarios should include long-term experiments for resistance to environmental degradation and load changes over time, to validate the findings. Additionally, study of the cost-effectiveness and life cycle costing of SS550 reinforcements in various structural applications will provide additional understanding. In summary, this study highlights the transformational potential of Stainless Steel HYSD reinforcements to modernize building practices, as SS550 mitigates fundamental environmental corrosion and structural sustainability issues, while paving the way for increased strength, durability, and sustainability of RCC structures, with particular impact on infrastructure projects requiring long term endurance and reliability.

7. Closing Remarks

This investigation illustrates the substantial potential of metal HYSD reinforcements to resolve several of the most significant obstacles in contemporary construction. SS550 reinforcements provide a sustainable and durable alternative to conventional HYSD steel, offering greater corrosion resistance, enhanced ductility and a longer service life. This study's results represent a step forward in the

transformation of construction techniques, especially for infrastructure projects in harsh environments and seismic zones. Stainless Steel HYSD is a sophisticated material that underscores a dedication to durability and sustainability as our building industry transitions to more ecologically responsible and robust solutions [61]. This study serves as a platform for future research and innovation, assisting engineers, policymakers, and stakeholders in making informed choices that progress the future of construction by prioritizing safety, efficiency, and sustainability.

Author Statements:

- **Ethical approval:** The conducted research is not related to either human or animal use.
- **Conflict of interest:** The authors affirm that they have not encountered any competing financial or close connections that may have appeared to have influenced the work mentioned in this paper.
- **Acknowledgement:** This study wasn't given any specific provide from funding bodies in the broader public, commercial ones, or not-for-profit sectors.
- **Author contributions:** "All authors contributed to the study conception and design. Material preparation, data collection and analysis were performed by [Mr. Avadhut Makarand Behere] and [Prof. Vrunda Agarkar]. The first draft of the manuscript was written by [Prof. Ruchi Patira] and all authors commented on previous versions of the manuscript. All authors read and approved the final manuscript."
- **Funding information:** The authors declare that there is no funding to be acknowledged.
- **Data availability statement:** The data that support the findings of this study are available on request from the corresponding author. The data are not publicly available due to privacy or ethical restrictions.

References

- [1] J. Chen, Z. Wang, Z. Liu, and S. Ju, (2022). Experimental investigation of mechanical properties of steel half-grouted sleeve splice with Reinforcement bonding defects, *Journal of Building Engineering*, vol. 50, doi: 10.1016/j.job.2022.104113.
- [2] Z. Chen, L. Mo, S. Li, Y. Liang, and D. Xu, Seismic (2021). Behavior of steel reinforced concrete L-shaped columns under compression-bending-shear-torsion combined action, *Journal of Building Engineering*, vol. 42, doi: 10.1016/j.job.2021.102498.
- [3] B. Huang, Z. Cheng, and J. Yao, (2022). Experimental study on flexural behavior of Reinforcement concrete beams in industrial building exceeding 50 years, *Journal of Building Engineering*, vol. 46, doi: 10.1016/j.job.2021.103697.
- [4] Z. Chen, L. Gao, and D. A. Koleva, (2022). Evaluating the stray current corrosion of steel Reinforcement in different layouts, *Measurement (Lond)*, vol. 196, doi: 10.1016/j.measurement.2022.111217.
- [5] Z. Wang, K. Xie, P. Tian, and J. Lu, (2024). Study on mechanical properties and bearing capacity calculation of eccentric compression of RC columns reinforced with prestressed lattice steel, *Structures*, vol. 64, doi: 10.1016/j.istruc.2024.106499.
- [6] J. Zhang, X. Liu, J. Liu, M. Zhang, and W. Cao, (2023). Seismic performance and reparability assessment of recycled aggregate concrete columns with ultra-high-strength steel bars, *Eng Struct*, vol. 277, doi: 10.1016/j.engstruct.2022.115426.
- [7] P. Han, G. Qiao, and J. Ou, (2022). Damage investigations of the Reinforcement under the coupling effect of fatigue and stray electric field induced corrosion, *Int J Fatigue*, vol. 160, doi: 10.1016/j.ijfatigue.2022.106844.
- [8] Z. Xin, X. Jianyang, R. Rui, and M. Linlin, (2021). Test on pure torsion behavior of channel steel reinforced concrete beams, *Journal of Building Engineering*, vol. 44, doi: 10.1016/j.job.2021.102967.
- [9] Y. Li and H. Aoude, (2023). Effects of stainless steel reinforcement and fibers on the flexural behaviour of high-strength concrete beams subjected to static and blast loading, *Eng Struct*, vol. 291, doi: 10.1016/j.engstruct.2023.116398.
- [10] H. Moodley, S. Afshan, D. Crump, and M. M. Kashani, (2024). Testing and numerical modelling of circular stainless steel reinforced concrete columns, *Eng Struct*, vol. 304, doi: 10.1016/j.engstruct.2024.117607.
- [11] S. Duan, S. Fan, G. Shu, L. Jiang, J. Tong, and Y. Wu, (2024). Numerical study and design of S35657 stainless steel welded stub columns, *J Constr Steel Res*, vol. 214, doi: 10.1016/j.jcsr.2024.108473.
- [12] F. J. Meza, N. Baddoo, and L. Gardner, (2024). Derivation of stainless steel material factors for European and U.S. design standards, *J Constr Steel Res*, vol. 213, doi: 10.1016/j.jcsr.2023.108383.
- [13] D. Y. Yoo et al., (2024). Strain-hardening effect on the flexural behavior of ultra-high-performance fiber-reinforced concrete beams with steel Reinforcements, *Developments in the Built Environment*, vol. 17, doi: 10.1016/j.dibe.2024.100343.
- [14] X. Han et al., (2023). Reinforcement corrosion detection in concrete based on capacitance principle, *Measurement (Lond)*, vol. 209, doi: 10.1016/j.measurement.2023.112526.
- [15] J. Guo, T. M. Chan, and Y. Wang, (2024). Test, modelling and design of a demountable stainless steel bar connection system for precast concrete pavements, *Eng Struct*, vol. 301, doi: 10.1016/j.engstruct.2023.117231.
- [16] Y. Ding, B. Zeng, Z. Zhou, Y. Wei, and M. Zhu, (2024). Seismic retrofitting of RC columns using stainless steel grid-reinforced UHPC jackets in plastic

- hinge zone, *Journal of Building Engineering*, vol. 84, doi: 10.1016/j.jobbe.2024.108637.
- [17] T. Chen, S. Fan, Q. Xu, K. Xu, J. Luo, and Y. Tang, (2024). Research on mechanical properties of duplex stainless steel S22053 at elevated temperature and after fire, *Thin-Walled Structures*, vol. 197, doi: 10.1016/j.tws.2024.111620.
- [18] B. Zheng, D. Wu, J. Wang, and G. Shu, (2024). Study on ductile fracture behaviors of stainless steel S30408 and its weld, *J Constr Steel Res*, vol. 214, doi: 10.1016/j.jcsr.2024.108498.
- [19] E. Freitas, A. S. Louro, H. Costa, E. S. Cavaco, E. Júlio, and M. Pipa, (2020). Bond behaviour between steel / stainless-steel reinforcing bars and low binder concrete (LBC), *Eng Struct*, vol. 221, doi: 10.1016/j.engstruct.2020.111072.
- [20] M. Rabi, R. Shamass, and K. A. Cashell, (2022). Structural performance of stainless steel reinforced concrete members: A review, *Elsevier Ltd*. doi: 10.1016/j.conbuildmat.2022.126673.
- [21] Z. Xing, M. Jiang, B. San, J. Wang, and K. Wu, (2024). Fire behaviour of stainless steel circular hollow section stub columns: Experimental study and design, *Thin-Walled Structures*, vol. 196, doi: 10.1016/j.tws.2023.111494.
- [22] M. Rabi, K. A. Cashell, and R. Shamass, (2019). Flexural analysis and design of stainless steel reinforced concrete beams, *Eng Struct*, vol. 198, doi: 10.1016/j.engstruct.2019.109432.
- [23] J. Y. Fu, X. Ge, J. T. Li, Z. G. Sun, and D. S. Wang, (2022). Seismic performance of concrete bridge piers reinforced by stainless steel bars: A quasi-static experimental study, *Eng Struct*, vol. 266, doi: 10.1016/j.engstruct.2022.114507.
- [31] Ahmed E S, J., & Ganesh, G. M. (2022). A Comprehensive Overview on Corrosion in RCC and Its Prevention Using Various Green Corrosion Inhibitors. *Buildings*, 12(10), 1682. <https://doi.org/10.3390/buildings12101682>
- [32] Attia, M. M., El-Latief, A. A., & Eita, M. A. (2023). Performance of RC beams with novelty GFRP under the bending load: An experimental and FE study. *Case Studies in Construction Materials*, 18, e02000. <https://doi.org/10.1016/j.cscm.2023.e02000>
- [33] Baddoo, N. R. (2008). Stainless steel in construction: A review of research, applications, challenges and opportunities. *Journal of Constructional Steel Research*, 64(11), 1199–1206. <https://doi.org/10.1016/j.jcsr.2008.07.011>
- [34] Brożek, J. L., Akl, E. A., Jaeschke, R., Lang, D. M., Bossuyt, P., Glasziou, P., Helfand, M., Ueffing, E., Alonso- Coello, P., Meerpohl, J., Phillips, B., Horvath, A. R., Bousquet, J., Guyatt, G. H., Schünemann, H. J., & for the GRADE Working Group. (2009). Grading quality of evidence and strength of recommendations in clinical practice guidelines: Part 2 of 3. The GRADE approach to grading quality of evidence about diagnostic tests and strategies. *Allergy*, 64(8), 1109–1116. <https://doi.org/10.1111/j.1398-9995.2009.02083.x>
- [35] Chang, P. K., Peng, Y. N., & Hwang, C. L. (2001). A design consideration for durability of high-performance concrete. *Cement and Concrete Composites*, 23(4–5), 375–380. [https://doi.org/10.1016/S0958-9465\(00\)00089-5](https://doi.org/10.1016/S0958-9465(00)00089-5)
- [36] Chen, X., Yang, H., & Zhang, W. (2018). Simulation-based approach to optimize passively designed buildings: A case study on a typical architectural form in hot and humid climates. *Renewable and Sustainable Energy Reviews*, 82, 1712–1725. <https://doi.org/10.1016/j.rser.2017.06.018>
- [37] Christopoulos, C., & Zhong, C. (2022). Towards understanding, estimating and mitigating higher-mode effects for more resilient tall buildings. *Resilient Cities and Structures*, 1(1), 53–64. <https://doi.org/10.1016/j.rcns.2022.03.005>
- [38] Devin, A., & Fanning, P. J. (2019). Non-structural elements and the dynamic response of buildings: A review. *Engineering Structures*, 187, 242–250. <https://doi.org/10.1016/j.engstruct.2019.02.044>
- [39] Di Sarno, L., Elnashai, A. S., & Nethercot, D. A. (2006). Seismic retrofitting of framed structures with stainless steel. *Journal of Constructional Steel Research*, 62(1–2), 93–104. <https://doi.org/10.1016/j.jcsr.2005.05.007>
- [40] Dissanayake, H., Gunawardena, T., & Mendis, P. (2025). Adaptation of Connection Systems for Integration with Engineered Wood Products in Buildings: A Systematic Review. *Buildings*, 15(7), 1131. <https://doi.org/10.3390/buildings15071131>
- [24] H. Yang, J. Mei, and Y. Yang, (2022). Bond strength and reliability analysis of stainless steel Reinforcement embedded in fiber reinforced coral aggregate concrete, *Constr Build Mater*, vol. 350, doi: 10.1016/j.conbuildmat.2022.128783.
- [25] K. Islam, A. M. Billah, M. M. I. Chowdhury, and K. S. Ahmed, (2020). Exploratory study on bond behavior of plain and sand coated stainless steel Reinforcements in concrete, *Structures*, vol. 27, doi: 10.1016/j.istruc.2020.07.039.
- [26] C. Xu, M. L. Nehdi, M. A. Youssef, T. Wang, and L. V. Zhang, (2021). Seismic performance of RC beam-column edge joints reinforced with austenite stainless steel, *Eng Struct*, vol. 232, doi: 10.1016/j.engstruct.2020.111824.
- [27] K. Li, W. Liu, K. Zhang, X. Wang, J. Zhu, and S. Sheikh, (2021). Bond behavior of stainless steel wire ropes embedded in engineered cementitious composites, *Constr Build Mater*, vol. 281, doi: 10.1016/j.conbuildmat.2021.122622.
- [28] M. Rabi, K. A. Cashell, R. Shamass, and P. Desnerck, (2020). Bond behaviour of austenitic stainless steel reinforced concrete, *Eng Struct*, vol. 221, doi: 10.1016/j.engstruct.2020.111027.
- [29] R. Shamass and K. A. Cashell, (2019). Analysis of stainless steel-concrete composite beams, *J Constr Steel Res*, vol. 152, doi: 10.1016/j.jcsr.2018.05.032.
- [30] B. K. Hwang, T. S. Kim, and Y. H. Ahn, (2024). Experimental and numerical investigation of austenitic stainless steel (304 type) slit damper structural behavior, *Thin-Walled Structures*, vol. 196, doi: 10.1016/j.tws.2023.111551.

- [41] Elkafrawy, M., Gowrishankar, P., Aswad, N. G., Alashkar, A., Khalil, A., AlHamaydeh, M., & Hawileh, R. (2024). GFRP-Reinforced Concrete Columns: State-of-the-Art, Behavior, and Research Needs. *Buildings*, 14(10), 3131. <https://doi.org/10.3390/buildings14103131>
- [42] Fawzy, K., Moustafa, A., & Farouk, M. A. (2024). Innovative reinforcement techniques for optimizing the performance of shallow, wide beams in reinforced concrete structures. *Innovative Infrastructure Solutions*, 9(10), 395. <https://doi.org/10.1007/s41062-024-01708-x>
- [43] Fayed, S., Madenci, E., Onuralp Özkiliç, Y., & Mansour, W. (2023). Improving bond performance of ribbed steel bars embedded in recycled aggregate concrete using steel mesh fabric confinement. *Construction and Building Materials*, 369, 130452. <https://doi.org/10.1016/j.conbuildmat.2023.130452>
- [44] Gardner, L. (2019). Stability and design of stainless steel structures – Review and outlook. *Thin-Walled Structures*, 141, 208–216. <https://doi.org/10.1016/j.tws.2019.04.019>
- [45] Gardner, L., Cruise, R. B., Sok, C. P., Krishnan, K., & Ministro Dos Santos, J. (2007). Life-cycle costing of metallic structures. *Proceedings of the Institution of Civil Engineers - Engineering Sustainability*, 160(4), 167–177. <https://doi.org/10.1680/ensu.2007.160.4.167>
- [46] Gedge, G. (2008). Structural uses of stainless steel—Buildings and civil engineering. *Journal of Constructional Steel Research*, 64(11), 1194–1198. <https://doi.org/10.1016/j.jcsr.2008.05.006>
- [47] Haile, F., Adkins, J., & Corradi, M. (2022). A Review of the Use of Titanium for Reinforcement of Masonry Structures. *Materials*, 15(13), 4561. <https://doi.org/10.3390/ma15134561>
- [48] Hassan, W. M., & Elmsory, M. (2021). Database trends and critical review of seismic performance tests on high strength steel reinforced concrete components. *Engineering Structures*, 239, 112092. <https://doi.org/10.1016/j.engstruct.2021.112092>
- [49] Huang, Y., Zhang, X., Wang, L., & Hu, X. (2023). A Simplified Method for Evaluating the Diaphragm Flexibility for Frame-Shear Wall Structure under Earthquake Load. *Buildings*, 13(2), 376. <https://doi.org/10.3390/buildings13020376>
- [50] Li, T., Chien, S.-C., Ren, Z., Windl, W., Ernst, F., & Frankel, G. S. (2021). Understanding the efficacy of concentrated interstitial carbon in enhancing the pitting corrosion resistance of stainless steel. *Acta Materialia*, 221, 117433. <https://doi.org/10.1016/j.actamat.2021.117433>
- [51] Liu, H., Chen, R., Wen, M., Zhang, L., & Shen, Y. (2019). Optimizing parallel section length for small tensile specimen with fabrication non-uniformity in thickness. *Fusion Engineering and Design*, 147, 111244. <https://doi.org/10.1016/j.fusengdes.2019.111244>
- [52] Masciotta, M. G., & Lourenço, P. B. (2022). Seismic Analysis of Slender Monumental Structures: Current Strategies and Challenges. *Applied Sciences*, 12(14), 7340. <https://doi.org/10.3390/app12147340>
- [53] McKenzie, D. R. (1993). Generation and applications of compressive stress induced by low energy ion beam bombardment. *Journal of Vacuum Science & Technology B: Microelectronics and Nanometer Structures Processing, Measurement, and Phenomena*, 11(5), 1928–1935. <https://doi.org/10.1116/1.586524>
- [54] Mechtcherine, V. (2012). Towards a durability framework for structural elements and structures made of or strengthened with high-performance fibre-reinforced composites. *Construction and Building Materials*, 31, 94–104. <https://doi.org/10.1016/j.conbuildmat.2011.12.072>
- [55] Medhekar, M. S., & Kennedy, D. J. L. (2000). Displacement-based seismic design of buildings—Theory. *Engineering Structures*, 22(3), 201–209. [https://doi.org/10.1016/S0141-0296\(98\)00092-3](https://doi.org/10.1016/S0141-0296(98)00092-3)
- [56] Nair, S. A. O., & Pillai, R. G. (2020). Microstructural and corrosion characteristics of Quenched and Self-Tempered (QST) steel reinforcing bars. *Construction and Building Materials*, 231, 117109. <https://doi.org/10.1016/j.conbuildmat.2019.117109>
- [57] Qin, X., & Kaewunruen, S. (2023). Eco-Friendly Design and Sustainability Assessments of Fibre-Reinforced High-Strength Concrete Structures Automated by Data-Driven Machine Learning Models. *Sustainability*, 15(8), 6640. <https://doi.org/10.3390/su15086640>
- [58] Rabi, M., Shamass, R., & Cashell, K. A. (2022). Structural performance of stainless steel reinforced concrete members: A review. *Construction and Building Materials*, 325, 126673. <https://doi.org/10.1016/j.conbuildmat.2022.126673>
- [59] Ramli, R., Mohd Hashim, M. H., Alisibramulisi, A., Mohamed Noor, S., & Abdul Razak, M. F. (2022). Tensile Strength Testing of +45° Isotropic FRP Laminate on Different Universal Testing Machines. In A. Ismail, W. M. Dahalan, & A. Öchsner (Eds.), *Design in Maritime Engineering (Vol. 167, 69–81)*. Springer International Publishing. https://doi.org/10.1007/978-3-030-89988-2_6
- [60] Reddy, G. S. R., Bolla, M., Patton, M. L., & Adak, D. (2021). Comparative study on structural behaviour of circular and square section-Concrete Filled Steel Tube (CFST) and Reinforced Cement Concrete (RCC) stub column. *Structures*, 29, 2067–2081. <https://doi.org/10.1016/j.istruc.2020.12.078>
- [61] Rossi, B. (2014). Discussion on the use of stainless steel in constructions in view of sustainability. *Thin-Walled Structures*, 83, 182–189. <https://doi.org/10.1016/j.tws.2014.01.021>
- [62] Son, M., & Cording, E. J. (2007). Evaluation of Building Stiffness for Building Response Analysis to Excavation-Induced Ground Movements. *Journal of Geotechnical and Geoenvironmental Engineering*, 133(8), 995–1002. [https://doi.org/10.1061/\(ASCE\)1090-0241\(2007\)133:8\(995\)](https://doi.org/10.1061/(ASCE)1090-0241(2007)133:8(995))
- [63] Tadele, S. (2023). Seismic response of circular concrete columns reinforced with CSA G30.18 500W steel. <https://doi.org/10.14288/1.0435752>

- [64] Theodossopoulos, D., & Sinha, B. (2013). A review of analytical methods in the current design processes and assessment of performance of masonry structures. *Construction and Building Materials*, 41, 990–1001. <https://doi.org/10.1016/j.conbuildmat.2012.07.095>
- [65] Twisdale, L. A., Sues, R. H., & Lavelle, F. M. (1994). Reliability-based design methods for protective structures. *Structural Safety*, 15(1–2), 17–33. [https://doi.org/10.1016/0167-4730\(94\)90050-7](https://doi.org/10.1016/0167-4730(94)90050-7)
- [66] Walbridge, S., Fernando, D., & Adey, B. T. (2013). Total Cost-Benefit Analysis of Alternative Corrosion Management Strategies for a Steel Roadway Bridge. *Journal of Bridge Engineering*, 18(4), 318–327. [https://doi.org/10.1061/\(ASCE\)BE.1943-5592.0000374](https://doi.org/10.1061/(ASCE)BE.1943-5592.0000374)
- [67] Wang, Z., Wang, Y., Cao, Y., & Wang, Z. (2016). Measurement of shear modulus of materials based on the torsional mode of cantilever plate. *Construction and Building Materials*, 124, 1059–1071. <https://doi.org/10.1016/j.conbuildmat.2016.08.104>
- [68] Xu, Y., Li, Y., Chen, T., Dong, C., Zhang, K., & Bao, X. (2024). A short review of medical-grade stainless steel: Corrosion resistance and novel techniques. *Journal of Materials Research and Technology*, 29, 2788–2798. <https://doi.org/10.1016/j.jmrt.2024.01.240>
- [69] Yang, H., Yang, X., Varma, A. H., & Zhu, Y. (2019). Strain-Rate Effect and Constitutive Models for Q550 High-Strength Structural Steel. *Journal of Materials Engineering and Performance*, 28(11), 6626–6637. <https://doi.org/10.1007/s11665-019-04431-2>
- [70] Yuan, J., Li, P., Zhang, H., Yin, S., Xu, M., & Zhou, A. (2025). The Effects of Alloying Elements on the Corrosion of Rebar Steel in a Chloride Environment. *Metals*, 15(4), 383. <https://doi.org/10.3390/met15040383>
- [71] Zhang, H., Chen, Y., Pan, J., Dong, J., & Zhao, Q. (2024). Torsional behavior of super-span composite box girder with corrugated steel webs. *Structures*, 68, 107045. <https://doi.org/10.1016/j.istruc.2024.107045>
- [72] Zhang, K., Wang, S., Liu, W., & Shang, X. (2014). Characterization of stainless steel parts by Laser Metal Deposition Shaping. *Materials & Design*, 55, 104–119. <https://doi.org/10.1016/j.matdes.2013.09.006>
- [73] Zou, X.-K., & Chan, C.-M. (2005). An optimal resizing technique for seismic drift design of concrete buildings subjected to response spectrum and time history loadings. *Computers & Structures*, 83(19–20), 1689–1704. <https://doi.org/10.1016/j.compstruc.2004.10.002>